

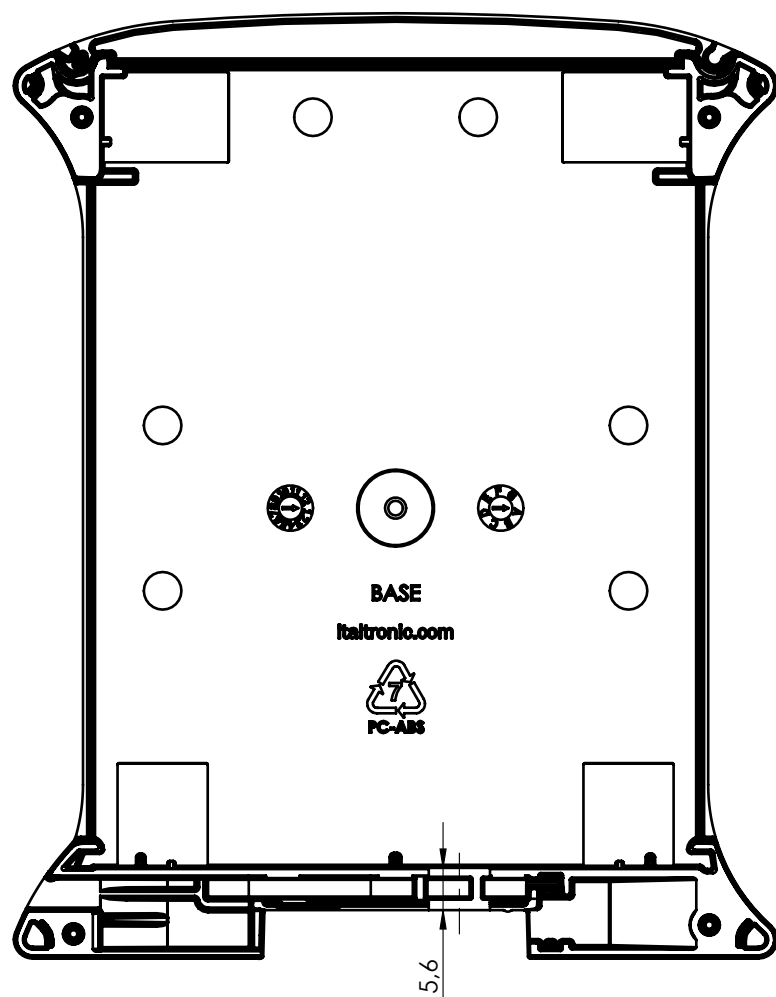


Maximum opening: 11 mm (8 pin)*
Recommended connectors:
- SSM 6-8 pin (Samtec)
- MMS 6-8 pin (Samtec)

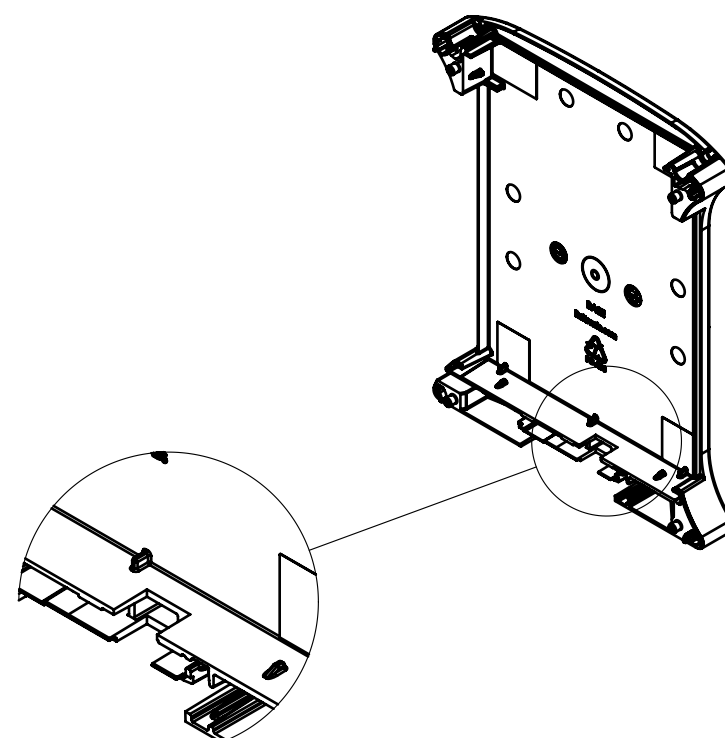


DETAIL A
SCALE 1 : 1

PCB
SCALA 1:1

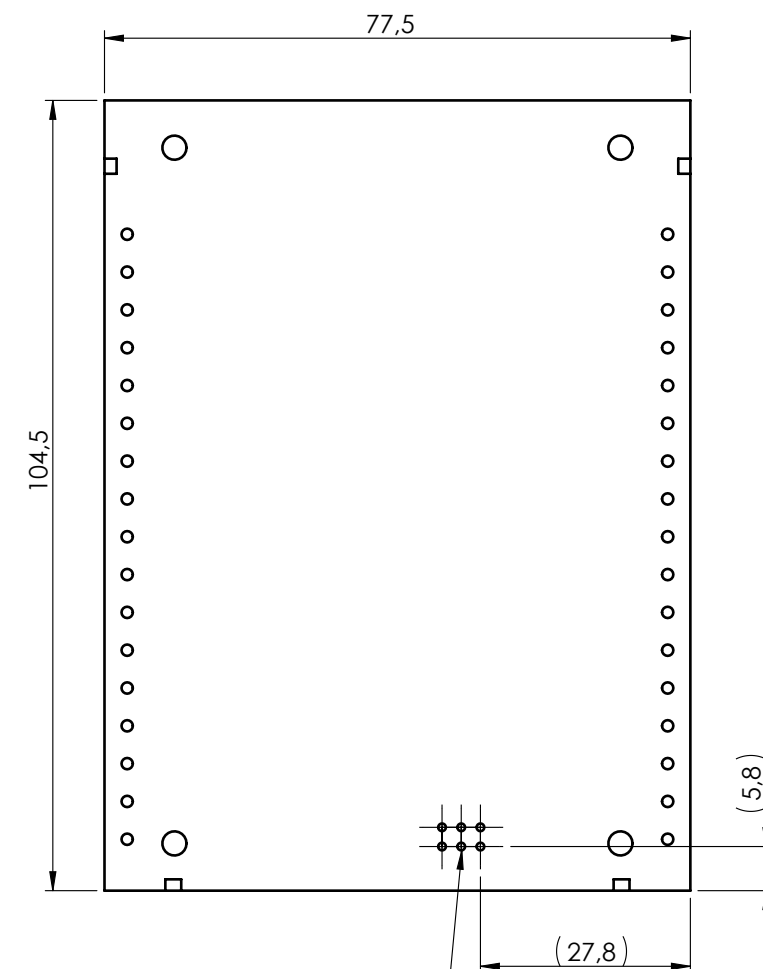

Recommended connectors:
- TSW-103-08-F-D-RA
6 pin (Samtec)
- TSW-104-08-F-D-RA
8 pin (Samtec)

General Tolerance UNI EN 22768/1 Media (m)						Sheet:				
from 0.5 to 3 ± 0.1		from 3 to 6 ± 0.1		from 6 to 30 ± 0.2		from 30 to 120 ± 0.3		from 120 to 400 ± 0.5		Foglio 1
Scale:	IM:	Drawed:	Checked:	Date:	Material:	Process:				
1:2	--	D.S.	R.N.	21/03/2025	PC/ABS-FR	CNC				
		The present drawing cannot be reproduced or communicated to 3rd parties, even partially, without the authorization of ITALTRONIC S.r.l. Italtronic reserves to protect its own rights according to the law.		Replaces the:	Derived from:	Weight:	Cod. Mold:			
Dimension in mm		--				25.15 gr	ST.10011022			
				Description: BASE RAILBOX XT VERTICAL DEMBUS BASE RAILBOX XT VERTICAL DEMBUS Drawing nr.:			Rev.:			
				2 110 00138			00		A3	

*For customized opening options, please contact our
Technical Department at: techcare@italtronic.com