

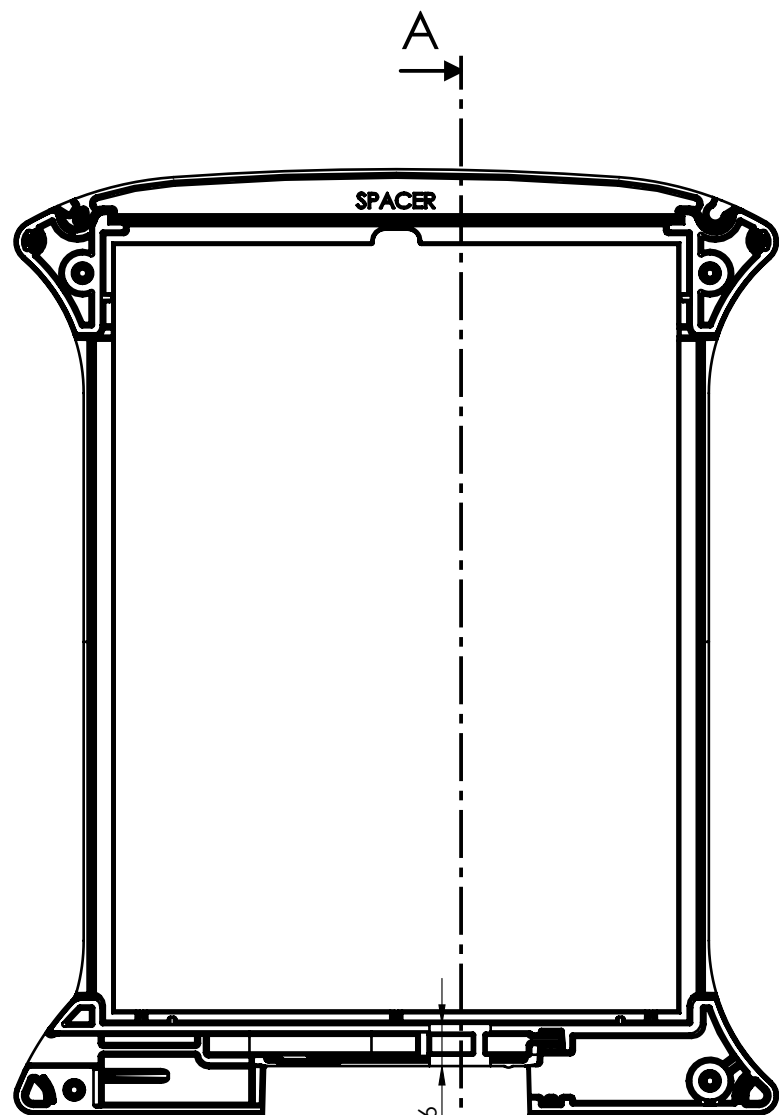
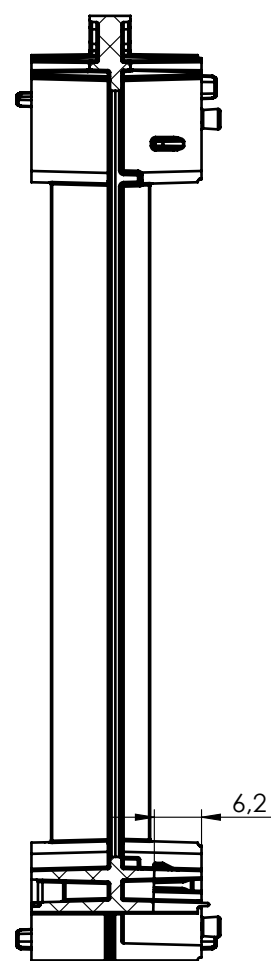


Maximum opening: 11 mm (8 pin)*
 Recommended connectors:
 - SSM 6-8 pin (Samtec)
 - MMS 6-8 pin (Samtec)

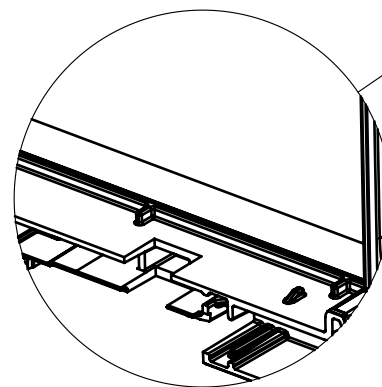


SECTION A-A

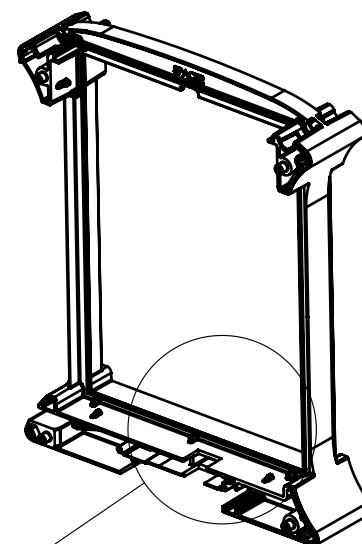

DETAIL B

PCB
 SCALA 1:1

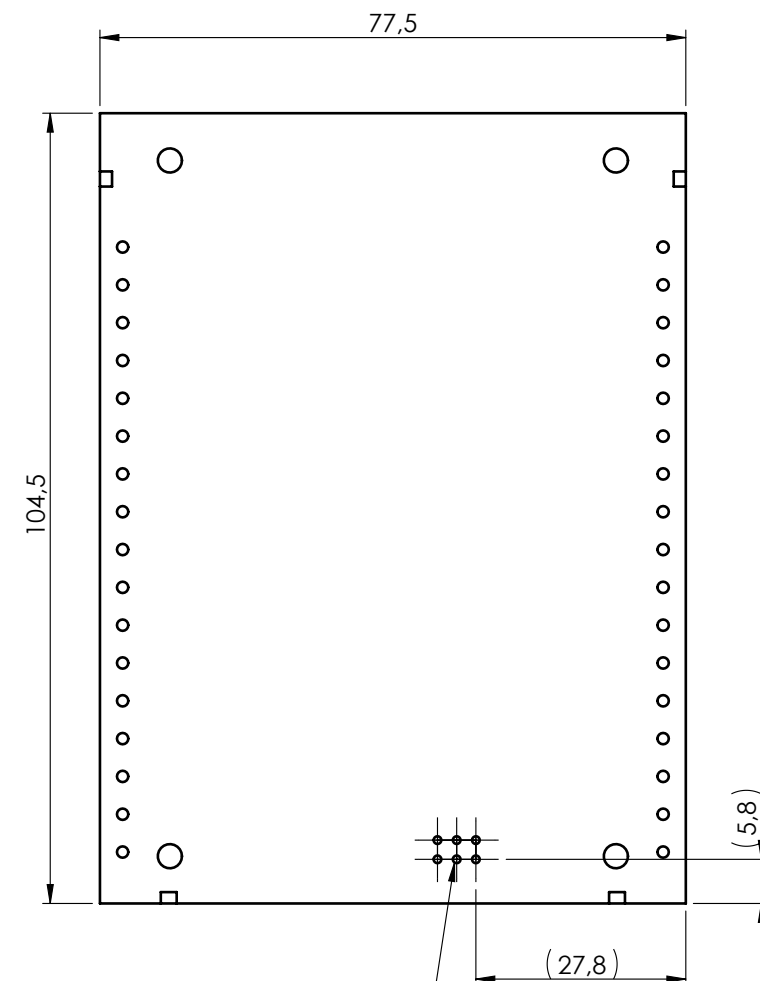

Recommended connectors:
 - TSW-103-08-F-D-RA
 6 pin (Samtec)
 - TSW-104-08-F-D-RA
 8 pin (Samtec)

General Tolerance UNI EN 22768/1 Media (m)					Sheet:
from 0.5 to 3 ± 0.1	from 3 to 6 ± 0.1	from 6 to 30 ± 0.2	from 30 to 120 ± 0.3	from 120 to 400 ± 0.5	Foglio 1
Scale: 1:1	IM: --	Drawed: D.S.	Checked: R.N.	Date: 12/05/2026	Material: PC/ABS-FR
		Replaces the: --	Derived from:	Weight: 23.73 gr	Process: CNC
Dimension in mm					Cod. Mold: ST.10001025
 enclosures for electronics italtronic.com		Description: DISTANZIALE RAILBOX XT VERTICAL DEMBUS SPACER RAILBOX XT VERTICAL DEMBUS Drawing nr.: 2 110 00150			Rev.: 00 A3

*For customized opening options, please contact our
 Technical Department at: techcare@italtronic.com